




NeoCD3.5H True Ribbon Tweeter

FEATURES

- Strong Neodymium magnet
- 3" reinforced sandwich diaphragm
- Built-in impedance converting transformer
- Low distortion, high sensitivity


Parameter	
Sensitivity	95.5dB/1m/2.83v
Power handling	12W nominal, 25W max
Frequency range	1,100-30,000Hz
Nominal impedance	7 ohm
DCR	0.02 ohm
Ribbon dimension	9mmX60mmX0.015mm
Effective ribbon area	360 square millimeter
Ribbon weight	30 milligram
Gap flux	0.5 Tesla average
Gap height	4 millimeter
Recommended crossover	2,500Hz with 3-order
Net. Weight	520 gram

SPL vs Freq

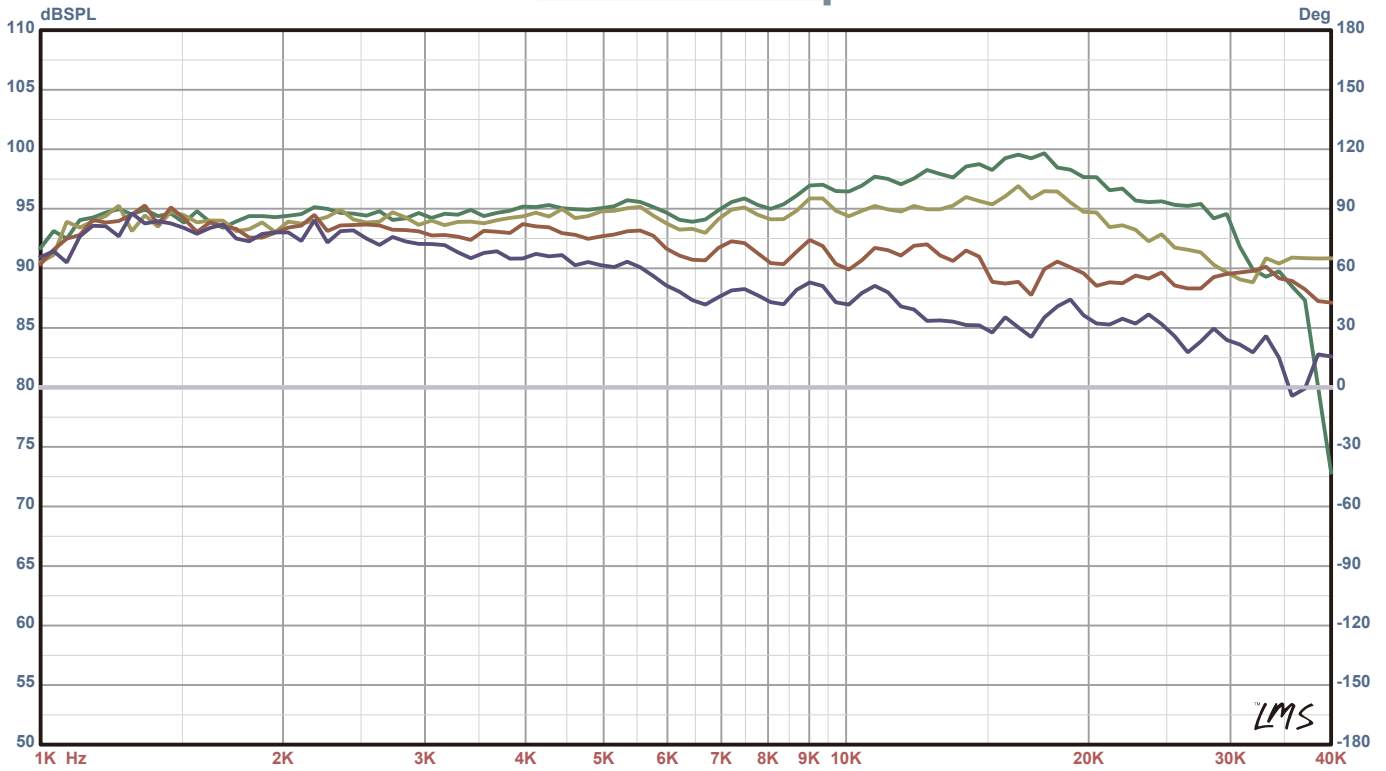

horizontal diffusion: on-axis, 15 degree, 30 degree, 45 degree

SPL vs Freq

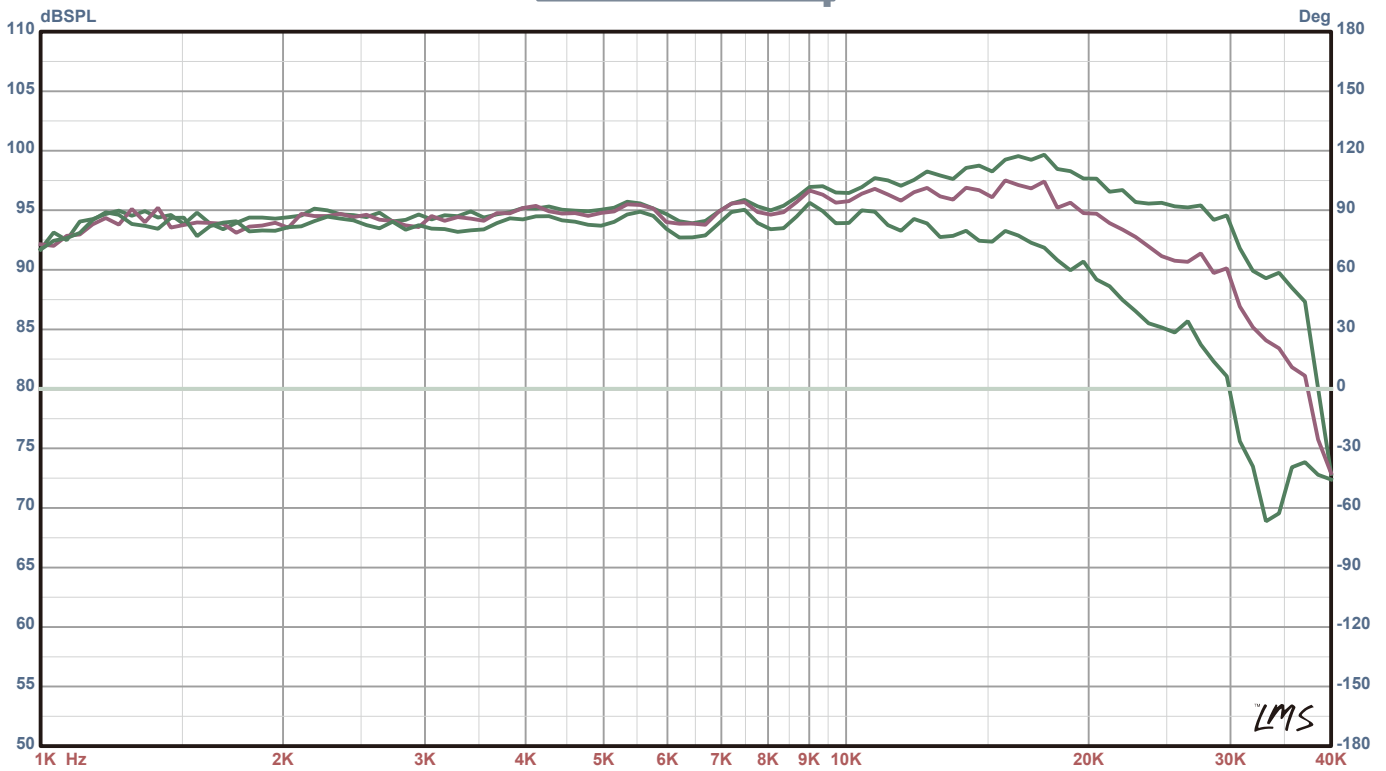

vertical diffusion: on-axis, 5 degree, 10 degree

